


CP-PAV-C341

4 Door Bell Outdoor Unit

- 1/4" Smart Sensor
- 4 Monitor Button (4x3 = 12 monitors Support)
- One Lock Support

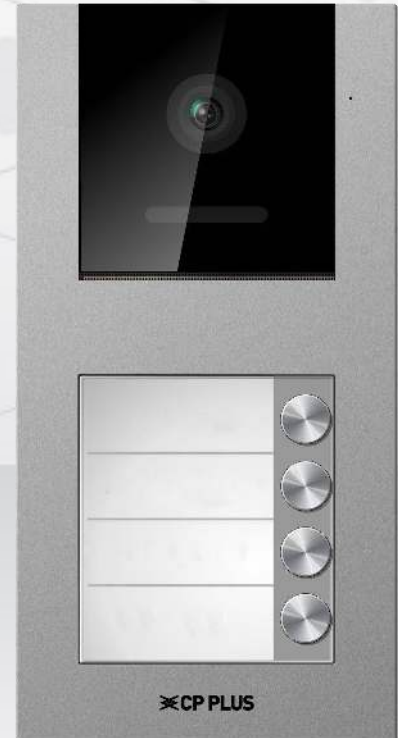

System Overview

CP PLUS has introduced a wide range of Video Door-Phones (also known as video door entry or video intercom) which are stand-alone intercom systems that you can use to manage calls made at the entrance to a building (residential complex, detached family home, workplace, etc.) with access controlled by audio visual communication between the inside and outside.


Functions

Electronically Controlled Door Locking

This product by CP Plus enables you to control the opening and locking of your electronically through the system instead of using the outdated key.

THINK SECURITY
THINK CP PLUS

 **CP PLUS**

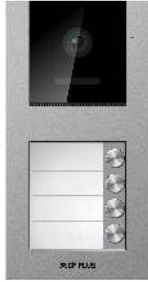

CP-PAV-C341

4 Door Bell Outdoor Unit

Functions

High-resolution Outdoor unit for Clearer Identification

The product has been integrated with a high-resolution lens that produces clear and vivid details to you for better and accurate identification of the visitors.


Built-in IR for Night Vision

The built-in IR technology in this product radiates infrared light to hinder the dark of night from disabling your vision. It keeps the area properly illuminated for you to see even at night-time.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.

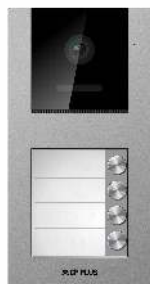

CP-PAV-C341

4 Door Bell Outdoor Unit

Feature	Specification
Sensor	1/4" Smart Sensor
Monitor Support	4 Button (4x3 = 12 monitors Support)
Horizontal View Angle	90°
Diagonal Angle	105°
Lock Support	Support one Lock
Effective pixels	960(H) × 576(V)
Illuminance	0.1 Lux@(F1.2,AGC ON), 0LUX with IR
Shutter	Auto
Synchronization	Inter-sync
Frame rate	960H @25fps/960H @30fps
Video Output	CVBS
Temperature/humidity	-20 to 60°C, Relative humidity is less than 90%
Efficiency	DC12V (±20%) - 60mA
Dimensions	32mm x 32mm