


CP- UNC-TB21L3-MDS**2MP Full HD WDR IR Network Bullet Camera - 30Mtr.****Main Features**

- 1/2.8" 2MP CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- H.265+ and H.264+ Dual Stream coding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

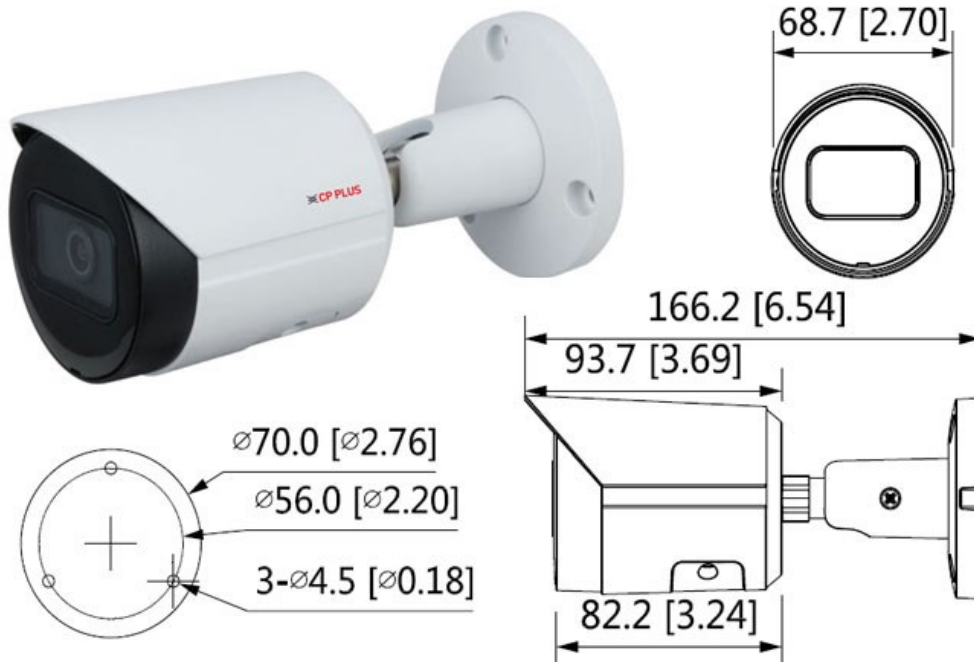

CP- UNC-TB21L3-MDS

2MP Full HD WDR IR Network Bullet Camera - 30Mtr.

Feature

Image Sensor

Minimum Illumination

Effective Pixels

Shutter Speed

S/N Ratio

White Balance

Lens

Gain Control (AGC)

Video Compression

Angle of View

Back Light Compensation

Video Streaming

Resolution

Motion detection

Privacy Mask

ICR

ROI

Bit Rate

Protocol

Smart Detection

Ethernet

Event Trigger

User Account

IR

Smart Phone

Micro SD

Specification

1/2.8" 2MP Progressive scan CMOS

0.002Lux@F1.6

1920(H) x 1080(V)

Auto/Manual 1/3 s–1/100000 s

>56dB

Auto/natural/street lamp/outdoor/manual/regional custom

3.6mm fixed lens (2.8mm optional)

Auto/Manual

H.265+; H.265; H.264+; H.264; H.264B; MJPEG (only supported by sub stream)

2.8mm: Horizontal: 106.0° Vertical: 56.0° Diagonal: 126.0°
3.6mm: Horizontal: 87.0° Vertical: 46.0° Diagonal: 104.0°

BLC / HLC / WDR(120dB)

Main Stream: (1920 x 1080@25 fps) Sub Stream: (704 x 576@25 fps), (704 x 480@30 fps)

1080P (1920 x 1080); 1.3M (1280 x 960); 720p (1280 x 720); D1 (704 x 576/704 x 480); VGA (640 x 480); CIF (352 x 288/352 x 240)

OFF/ON (4 areas, rectangular)

4 areas

Auto (ICR)/Color/B/W

Yes (4 areas)

H.264: 32 kbps–6144 kbps , H.265: 12 kbps–6144 kbps

IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP ; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; Bonjour, ONVIF (Profile S/ Profile G/ Profile T); CGI; Milestone; Genetec

Tripwire, Intrusion

RJ-45 (10/100Base-T)

Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal access, Storage anomaly

20 Users

IR Range of 30 Mtr., Smart IR

iPhone, iPad, Android Phone

FTP; SFTP; Micro SD card (256GB); NAS

CP- UNC-TB21L3-MDS**2MP Full HD WDR IR Network Bullet Camera - 30Mtr.****Feature**

Storage Temperature
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

-40°C to +60°C (-40°F to +140°F)
-40°C to +60°C (-40°F to +140°F)
≤95%
12V DC/PoE (802.3af)
<4.9W
IP67
Metal
166.2 mm × Φ70 mm (6.54" × Φ2.76")
0.48 kg