


CP- UNC-TB41L3-MDS**4MP Full HD WDR IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 4MP CMOS image sensor
- 4MP (2560 × 1440)@25/30 fps
- Support Starlight Technology
- H.265+ and H.264+ Dual Stream Coding
- WDR(120dB), 3D-DNR, ROI, HLC, BLC, Digital watermarking, Rotation mode
- 3.6mm fixed lens (2.8mm optional)
- Built-in IR LED, IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

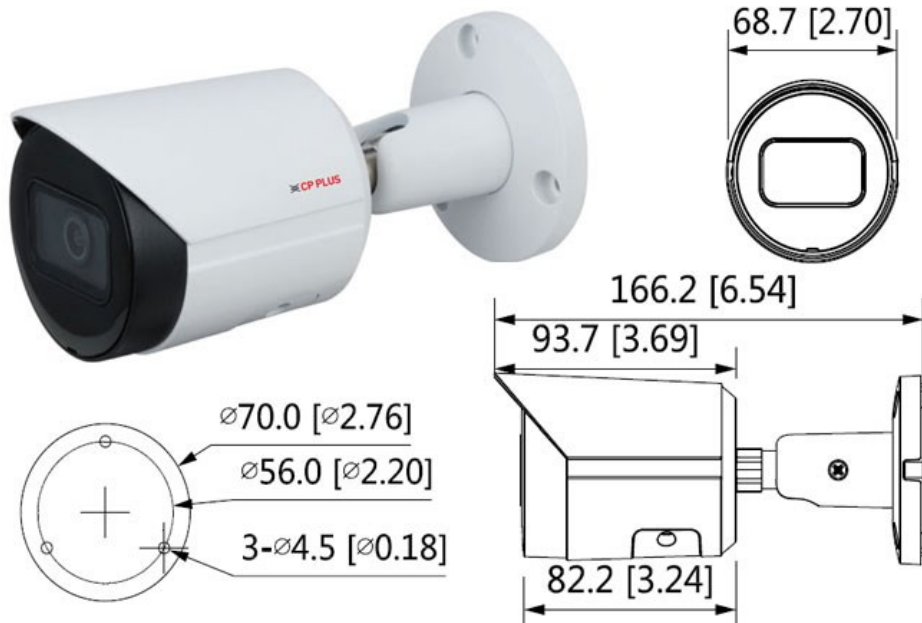

CP- UNC-TB41L3-MDS

4MP Full HD WDR IR Bullet Camera - 30Mtr.

Feature

Image Sensor

Effective Pixels

Minimum Illumination

S/N Ratio

Lens

Angle of View

White Balance

Gain Control (AGC)

Back Light Compensation

Video Compression

Resolution

Frame Rate

Motion detection

Privacy Mask

Mirror

ICR

ROI

Bit Rate

IVS

Event Trigger

Protocol

Ethernet

User Account

Specification

1/3" 4MP PS CMOS Image Sensor

2688 (H) × 1520 (V)

0.008 Lux@F1.6

>56dB

3.6mm fixed lens (2.8mm optional)

3.6mm: H: 84.0°, V: 45.0°, D: 100.0°

2.8mm: H: 102.0°, V: 55.0°, D: 121.0°

Auto/natural/street lamp/outdoor/manual/regional custom

Auto/Manual

BLC/ HLC/ WDR(120dB)

H.265+; H.265; H.264+; H.264; H.264B; MJPEG (only supported by sub stream)

4MP (2688 × 1520) 4MP(2560 × 1440) ; 3MP(2304 × 1296); 2MP (1920 × 1080);

1.3MP(1280 × 960); 720P (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480);

CIF (352 × 288/352 × 240)

Main stream: 2688 × 1520 (1 fps-20 fps) 2560 × 1440 (1 fps-25/30 fps)

Sub stream: 704 × 576 (1 fps-25 fps) 704 × 480 (1 fps-30 fps)

OFF/ON (4 areas, rectangular)

4 Areas

Yes

Auto (ICR)/Color/B/W

Yes (4 areas)

H.264: 32 kbps–6144 kbps , H.265: 12 kbps–6144 kbps

Intrusion; tripwire

Abnormality detection: Motion detection, video tempering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection

HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; RTMP; Multicast; HTTPS; SFTP; 802.1x; ICMP; IGMP; ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec

RJ-45 (10/100Base-T)

20 Users

CP- UNC-TB41L3-MDS**4MP Full HD WDR IR Bullet Camera - 30Mtr.****Feature**

IR
Smart Phone
Micro SD
Operating Temperature
Operating Humidity
Storage Temperature
Storage Humidity
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

IR Range of 30 Mtr.
iPhone, iPad, Android Phone
FTP; SFTP; Micro SD card (max. 256 GB); NAS
-40°C to +60°C (-40°F to +140°F)
≤95%
-40°C to +60°C (-40°F to +140°F)
≤95%
12V DC/PoE(802.3af)
<5W
IP67
Metal
166.2 mm × Φ70 mm (6.54" × Φ2.76")
0.48 kg