


CP- UNC-VB41L3-MDS

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

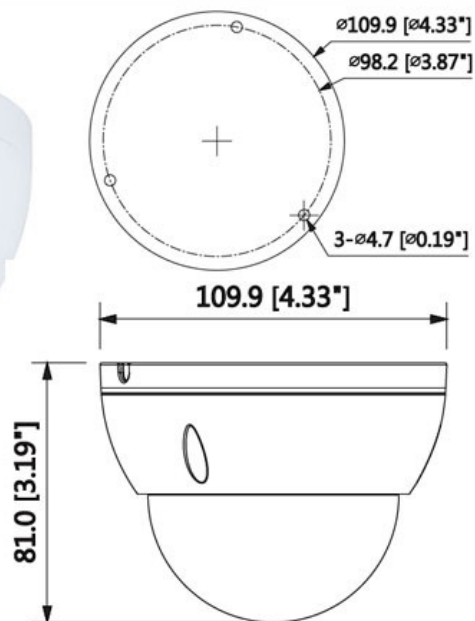

Main Features

- 1/3" 4MP CMOS Image sensor (0.84667cm)
- 4MP (2560 × 1440)@25/30fps
- Support Starlight Technology
- Instastream/H.264+ Dual Stream Coding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in IR LED, IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP- UNC-VB41L3-MDS

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor

Effective Pixels

Minimum Illumination

Electronic Shutter Speed

Field of View

White Balance

Lens

Gain Control (AGC)

Back Light Compensation

Video Compression

Resolution

Frame Rate

Mirror

Motion detection

Privacy Mask

ICR

ROI

Bit Rate

IVS

Event Trigger

Protocol

Ethernet

User Account

Specification

1/3" 4MP PS CMOS Image Sensor (0.84667cm)

2688 (H) × 1520 (V)

0.008 Lux@F1.6

Auto/Manual 1/3 s–1/100000 s

2.8 mm: Horizontal: 102.0°, Vertical: 55.0°, Diagonal: 121.0°

3.6 mm: Horizontal: 84.0°, Vertical: 45.0°, Diagonal: 100.0°

Auto/natural/street lamp/outdoor/manual/regional custom

3.6mm fixed lens (2.8mm optional)

Auto/Manual

BLC/ HLC/ WDR(120dB)

Instastream; H.265; H.264+; H.264; H.264B; MJPEG

2688 × 1520 (2688 × 1520); 2560 × 1440 (2560 × 1440); 2304 × 1296 (2304 × 1296); 1080P (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)

Main stream: 2688 × 1520 (1 fps-20 fps) 2560 × 1440 (1 fps-25/30 fps)

Sub stream: 704 × 576 (1 fps-25 fps) 704 × 480 (1 fps-30 fps)

Yes

OFF/ON (4 areas, rectangular)

4 Areas

Day/Night

Yes (4 areas)

H.264: 32 kbps–6144 kbps; H.265: 12 kbps–6144 kbps

Intrusion; tripwire

Abnormality detection: Motion detection, video tempering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection

HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; RTMP; Multicast; HTTPS; SFTP; 802.1x; ICMP; IGMP; ONVIF (Profile S/Profile G/T); CGI; Milestone; Genetec

RJ-45 (10/100Base-T)

20 Users



CP- UNC-VB41L3-MDS

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

Feature

IR
Smart Phone
Micro SD
Operating Temperature
Operating Humidity
Storage Temperature
Storage Humidity
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

IR Range of 30 Mtr.
iPhone, iPad, Android Phone
FTP; Micro SD card (max. 256 GB); NAS
-40°C to +60°C (-40°F to +140°F)
≤95%
-40°C to +60°C (-40°F to +140°F)
≤95%
12V DC/PoE
<5.2W
IP67, IK10
Metal
81mm × Φ109.9mm (3.19" × Φ4.33")
0.350 kg