

## DS-2CE11D0T-PIRLO 2 MP PIR Camera



### Key Feature

- 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart IR, up to 20 m IR distance
- PIR detection, strobe light alarm, alarm out
- IP67




## Specification

| <b>Camera</b>           |  |
|-------------------------|--|
| Image Sensor            | 2 MP CMOS  |
| Signal System           | PAL/NTSC   |
| Frame Rate              | TVI: 1080P@25fps, 1080P@30fps  |
| Resolution              | 1920 (H) × 1080 (V)  |
| Min. Illumination       | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR   |
| Shutter Time            | PAL: 1/25 s to 1/50, 000 s<br>NTSC: 1/30 s to 1/50, 000 s  |
| Lens                    | 2.8 mm, 3.6 mm fixed lens  |
| Field of View           | 2.8 mm, horizontal FOV: 103°, vertical FOV: 56°, diagonal FOV: 122°<br>3.6 mm, horizontal FOV: 82.2°, vertical FOV: 44°, diagonal FOV: 94° |
| Lens Mount              | M12  |
| Strobe Light Alarm      | Yes  |
| Day & Night             | ICR  |
| WDR                     | Digital WDR  |
| Angle Adjustment        | Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360°  |
| <b>Menu</b>             |  |
| White Light             | AUTO/OFF   |
| Image Mode              | STD/HIGH-SAT   |
| AGC                     | Yes  |
| Day/Night Mode          | Auto/Color/BW (Black and White)  |
| White Balance           | Auto/Manual  |
| AE (Auto Exposure) Mode | DWDR/BLC/HLC/Global  |
| Noise Reduction         | 2D DNR   |
| Language                | English  |
| Functions               | Brightness, Sharpness, Mirror, Smart IR  |
| <b>Interface</b>        |  |
| Video Output            | 1 HD analog output   |
| Alarm                   | 1 alarm out  |
| <b>General</b>          |  |
| Operating Conditions    | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensing)   |
| Power Supply            | 12 VDC ± 25%   |
| Power Consumption       | Max. 2.9 W   |
| Ingress Protection      | IP67   |
| Material                | Metal  |
| IR Range                | Up to 20 m   |
| PIR Angle and Range     | Angle: 110°, Range: 11 m   |
| White Light Range       | Up to 20 m   |
| Communication           | HIKVISION-C  |
| Dimensions              | 68 mm × 70 mm × 179.8 mm (2.68" × 2.76" × 7.08")   |
| Weight                  | Approx. 358 g (0.79 lb.)   |


## Order Model

DS-2CE11D0T-PIRLO

## Dimension

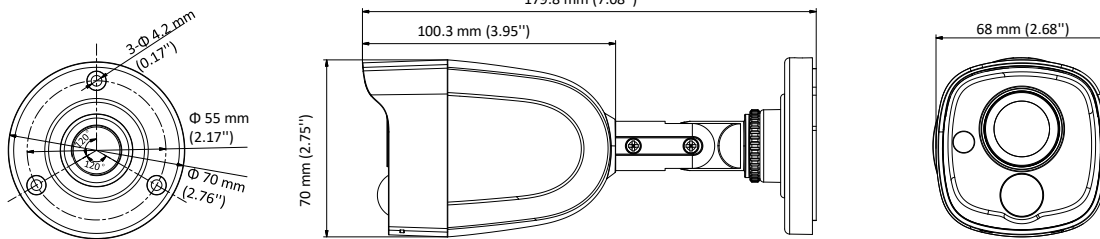

## Accessory



DS-1280ZJ-XS  
Junction Box

Distributed by



# HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com