

DHI-KTA02





- 7" TFT screen
- Video intercom function: Unlock, voice call, video call, volume adjustment
- System Capacity: 2 door stations + 3 indoor monitors
- Multiple bell sounds
- Supports digital wide dynamic range (DWDR)













Technical Specification

\ /TI	11	0	$^{\circ}$	п
VTH	11	U	2U	J

Gross Weight

V1H1U2UJ		
Button Type	Touch button	
Basic		
Display	7.0" TFT	
Screen Resolution	1024 × 600	
Status Indicator	1 indicator light Green: Power on	
Function		
Communication Mode	Analog	
Performance		
Casing	PC + ABS	
General		
Color	White	
Power Supply	DC12V/1A	
Power Adapter	Included	
Installation	Surface mount	
Certifications	CE/FCC	
Accessory	Bracket (included)	
Dimensions	133.90 mm × 182.70 mm × 17.70 mm (5.27" × 7.19" × 0.70")	
Operating Temperature	-10°C to +55°C (+14°F to +131°F)	
Operating Humidity	10%RH-95%RH	
Power Consumption	≤ 2W (standby) ≤ 5W (working)	
Net Weight	0.25 kg (0.55 lb)	

0.48 kg (1.05 lb)


VTO1000J

Button Type	Mechanical
Basic	
Camera	1.3MP CMOS
Field of View	Horizontal: 70° Vertical: 40°
WDR	DWDR
Illuminator Type	Auto IR
Day/Night	ICR auto switch
Audio Input	1 channel to the microphone; pickup distance 0.5 m
Audio Output	1 channel to the speaker
Status Indicator	1 indicator light Green: Power on
Function	
Communication Mode	Analog
Unlock Mode	Local unlock
Performance	
Casing	PC + ABS
Port	
Exit Button	1
Door Status Detection	1
General	
Color	Silver
Power Supply	Powered by indoor monitor
Installation	Surface mount

Certifications	CE/FCC	
Accessory	Rain cover (included)	
Dimensions	131.45 mm × 46.00 mm × 33.80 mm (5.18" × 1.81" × 1.33")	
Protection Grade	IP66 (Apply silicon sealant to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)	
Operating Temperature	-30°C to +60°C (-22°F to +140°F)	
Operating Humidity	10%RH-95%RH	
Power Consumption	≤ 1W (standby) ≤ 3W (working)	
Net Weight	0.18 kg (0.40 lb)	
Gross Weight	0.38 kg (0.84 lb)	

Ordering Information				
Туре	Model	Description		
Video Intercom Kit	DHI-KTA02	Video Intercom Kit		
Inclined Bracket	VTM22A	Horizontally Inclined Bracket		
Inclined Bracket	VTM23A	Vertically Inclined Bracket		

Dimensions (mm[inch])

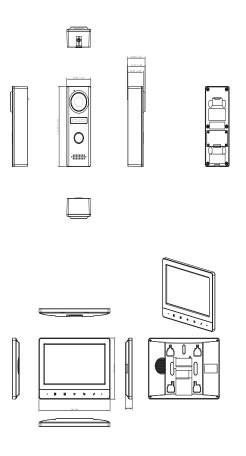

Application

