

DS-7608NI-K2/8P NVR

Key Feature

- Up to 8-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- 1 HDMI and 1 VGA interfaces, both interfaces support independent video output
- 2 SATA interfaces for HDD connection (up to 10 TB capacity per HDD)
- Up to 80 Mbps incoming bandwidth
- Plug-and-play with 8 power over Ethernet (PoE) interfaces



Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt stream over TLS encryption technology which provides more secure stream transmission service

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- 2 SATA interfaces for HDD connection (up to 10 TB capacity per HDD)
- 8-ch synchronous playback

Smart Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.) and ANPR

Network & Ethernet Access

- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- 8 independent PoE network interfaces
- Hik-Connect for easy network management




▪ Specification


| Video and Audio | |
|----------------------|---|
| IP Video Input | 8-ch |
| Incoming Bandwidth | 80 Mbps |
| Outgoing Bandwidth | 160 Mbps |
| HDMI Output | 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz |
| VGA Output | 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz |
| Video Output Mode | HDMI/VGA independent output |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1kΩ, using the audio input) |
| Decoding | |
| Decoding Format | H.265/H.265+/H.264/H.264+ |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Synchronous Playback | 8-ch |
| Decoding Capability | 1-ch@12 MP (30 fps)/2-ch@8 MP (30 fps)/4-ch@4 MP (30 fps)/8-ch@1080p (30 fps) |
| Stream Type | Video, Video & Audio |
| Audio Compression | G.711ulaw/G.711alaw/G.722/G.726 |
| Network | |
| Remote Connection | 128-ch |
| Network Protocol | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| PoE | |
| Interface | 8, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤ 80 W |
| Standard | IEEE 802.3 af/at |
| Auxiliary Interface | |
| SATA | 2 SATA interfaces |
| Capacity | Up to 10 TB capacity for each HDD |
| USB Interface | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0 |
| Alarm In/Out | 4/1 |
| General | |
| Power Supply | 48 VDC, 2.5A |
| Consumption | ≤ 15 W (without HDD and PoE off) |

| | |
|-----------------------|--|
| Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working Humidity | 10 to 90 % |
| Dimension (W × D × H) | 385 × 315 × 52 mm (15.2" × 12.4" × 2.0") |
| Weight | ≤ 3 kg (without HDD, 6.6 lb.) |
| Certification | |
| FCC | Part 15 Subpart B, ANSI C63.4-2014 |
| CE | EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017 |

Dimension

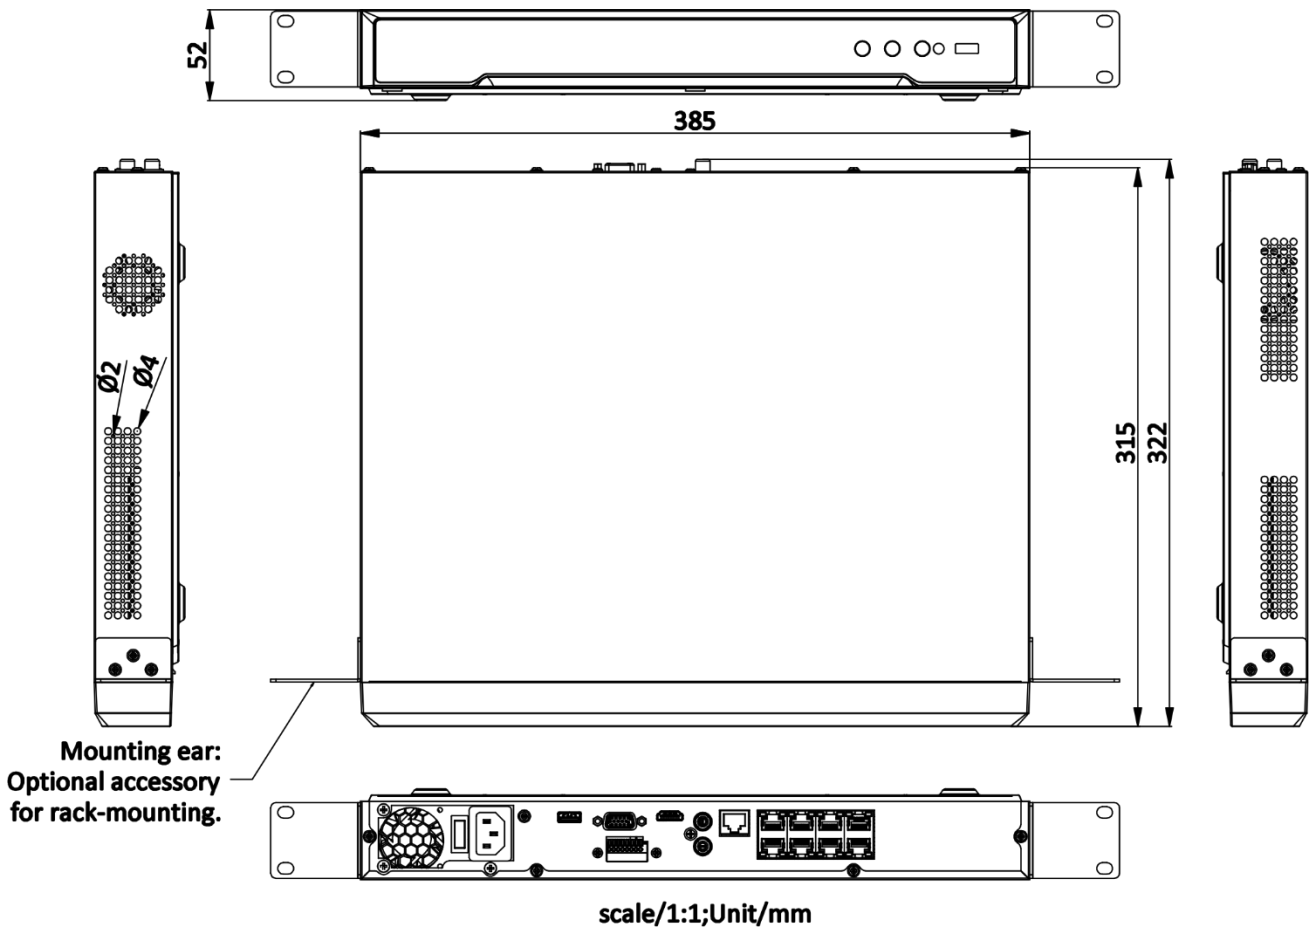

Physical Interface

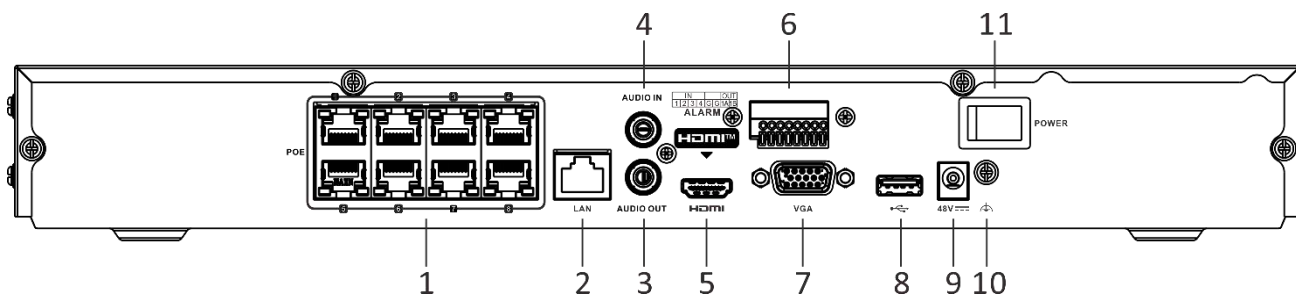

| No. | Description | No. | Description |
|-----|--------------------------------------|-----|---------------------|
| 1 | Network interfaces with PoE function | 7 | VGA Interface |
| 2 | LAN network interface | 8 | USB interface |
| 3 | AUDIO OUT | 9 | 48 VDC power supply |
| 4 | AUDIO IN | 10 | GND |
| 5 | HDMI interface | 11 | Power switch |
| 6 | Alarm in/alarm out | | |

Available Model

DS-7608NI-K2/8P

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com