

# ViewSonic® LCD DISPLAY TD1655


## Key Features

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual, power, and touch signal transmission
- Flexible display setup – work at any angle
- Compact size, light weight, and highly portable
- Sturdy and durable design



## Product Description

The ViewSonic TD1655 is a portable 16" Full HD touch monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual, power, and touch signal transmission. The adjustable wide stand and pivotable display will support your working angles. With the anti-slip cover, metal case, aluminum stand, and 6H hardness screen, reliability is embodied in the design.

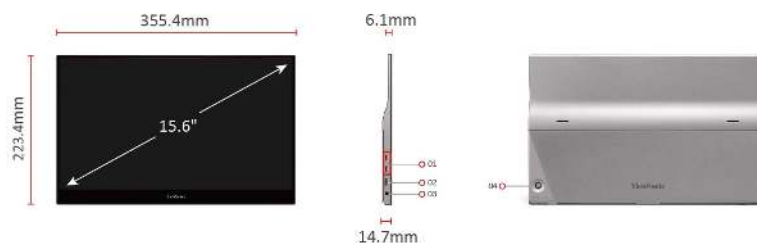

1. USB Type C x2
2. Mini HDMI
3. Audio Out
4. Joy Key

Visit Us [www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

|                                |  |
|--------------------------------|--|
| Display Size (in.):            | 16   |
| Viewable Area (in.):           | 15.6   |
| Panel Type:                    | IPS Technology   |
| Resolution:                    | 1920 x 1080  |
| Resolution Type:               | FHD (Full HD)  |
| Static Contrast Ratio:         | 800:1 (typ)  |
| Dynamic Contrast Ratio:        | 50M:1  |
| Light Source:                  | LED  |
| Brightness:                    | 250 cd/m <sup>2</sup> (typ)  |
| __Brightness (PCS):            | 250 cd/m <sup>2</sup> (typ)  |
| Colors:                        | 262K   |
| Color Space Support:           | 6 bit true   |
| Aspect Ratio:                  | 16:9   |
| Response Time (Typical GTG):   | 6.5ms  |
| Response Time (GTG w/OD):      | 6.599ms  |
| Response Time (Typical Tr+Tf): | 30ms   |
| Viewing Angles:                | 178° horizontal, 178° vertical, CR>5;<br>170° horizontal, 170° vertical, CR>10 |
| Backlight Life (Hours):        | 15000 Hrs (Min)  |
| Curvature:                     | Flat   |
| Refresh Rate (Hz):             | 60   |
| Blue Light Filter:             | Yes  |
| Color Gamut:                   | NTSC: 45% size (Typ) sRGB: 64%<br>size (Typ)                                   |
| Pixel Size:                    | 0.179 mm (H) x 0.179 mm (V)  |
| Touch Screen:                  | Projected Capacitive, 10-point multi-touch                                     |
| Surface Treatment:             | Glossy w/ anti-finger print, Hard Coating (≥6H)                                |
| Cover Glass Thickness:         | 0.8mm  |

**COMPATIBILITY**

|                        |                                       |
|------------------------|---------------------------------------|
| PC Resolution (max):   | 1920x1080                             |
| Mac® Resolution (max): | 1920x1080                             |
| PC Operating System:   | Windows 10/11 certified; macOS tested |
| Mac® Resolution (min): | 1920x1080                             |

**CONNECTOR**

|  |                                |
|--|--------------------------------|
| USB 3.2 Type C Up Stream; DisplayPort Alt mode : | 2 (60W power charger)          |
| 3.5mm Audio Out:                                 | 1                              |
| Mini HDMI:                                       | 1                              |
| Power in:  | USB Type C (with video & data) |

**AUDIO**

|                    |             |
|--------------------|-------------|
| Internal Speakers: | 0.8Watts x2 |
|--------------------|-------------|

**POWER**

|                        |                        |
|------------------------|------------------------|
| Eco Mode (Conserve):   | 6W                     |
| Eco Mode (optimized):  | 6.9W                   |
| Consumption (typical): | 8W                     |
| Consumption (max):     | 8.3W                   |
| Voltage:               | AC 100-240V            |
| Stand-by:              | 0.5W                   |
| Power Supply:          | External Power Adaptor |

**CONTROLS**

|                    |   |
|--------------------|---|
| Physical Controls: | Up, Right, Down, Left, Power  |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

**OPERATING CONDITIONS**

|                            |                             |
|----------------------------|-----------------------------|
| Temperature:               | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90%                  |

**INPUT SIGNAL**

|                       |            |
|-----------------------|------------|
| Frequency Horizontal: | 15 ~ 82KHz |
| Frequency Vertical:   | 50 ~ 75Hz  |

**VIDEO INPUT**

|               |  |
|---------------|--|
| Digital Sync: | TMDS - mini HDMI (v1.4), Micro-Packet - Type C |
|---------------|--|

**ERGONOMICS**

|                      |           |
|----------------------|-----------|
| Tilt (Forward/Back): | 20° / 60° |
|----------------------|-----------|

**WEIGHT (IMPERIAL)**

|                          |     |
|--------------------------|-----|
| Net (lbs):               | 2.1 |
| Net Without Stand (lbs): | 2.1 |
| Gross (lbs):             | 5.1 |

**WEIGHT (METRIC)**

|                         |      |
|-------------------------|------|
| Net (kg):               | 0.96 |
| Net Without Stand (kg): | 0.96 |
| Gross (kg):             | 2.3  |

**DIMENSIONS (IMPERIAL) (WXHxD)**

|                               |                   |
|-------------------------------|-------------------|
| Packaging (in.):              | 17.3 x 11.3 x 3.5 |
| Physical (in.):               | 14 x 8.8 x 0.6    |
| Physical Without Stand (in.): | 14 x 8.8 x 0.6    |

**DIMENSIONS (METRIC) (WXHxD)**

|                              |                |
|------------------------------|----------------|
| Packaging (mm):              | 440 x 288 x 89 |
| Physical (mm):               | 355 x 223 x 16 |
| Physical Without Stand (mm): | 355 x 223 x 16 |

**GENERAL**

|                   |  |
|-------------------|--|
| Regulations:      | cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, RCM, GEMS, VCCI, PSE, BIS  |
| PACKAGE CONTENTS: | TD1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover x1, Clean cloth x1, Passive touch pen x1 |
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws.   |
| Warranty:         | *Warranty offered may differ from market to market   |
| Power Management: | Energy Star standards, EPEAT   |