

# ViewSonic® LCD DISPLAY VG1655


## Key Features

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual and power signal transmission
- Flexible display setup – work at any angle
- Compact size, light weight, and highly portable
- Sturdy and durable design



## Product Description

The ViewSonic VG1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, metal case, and aluminum stand, reliability is embodied in the design.

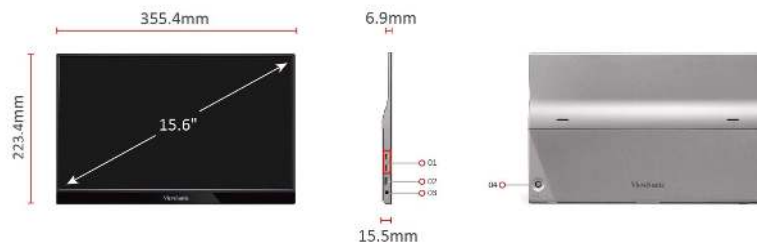

1. USB Type C x2
2. Mini HDMI
3. Audio Out
4. Joy Key

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

|                                |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| Display Size (in.):            | 16                                                                             |
| Viewable Area (in.):           | 15.6                                                                           |
| Panel Type:                    | IPS Technology                                                                 |
| Resolution:                    | 1920 x 1080                                                                    |
| Resolution Type:               | FHD (Full HD)                                                                  |
| Static Contrast Ratio:         | 800:1 (typ)                                                                    |
| Dynamic Contrast Ratio:        | 50M:1                                                                          |
| Light Source:                  | LED                                                                            |
| Brightness:                    | 250 cd/m <sup>2</sup> (typ)                                                    |
| __Brightness (PCS):            | 250 cd/m <sup>2</sup> (typ)                                                    |
| Colors:                        | 16.2M                                                                          |
| Color Space Support:           | 8 bit (6 bit + FRC)                                                            |
| Aspect Ratio:                  | 16:9                                                                           |
| Response Time (Typical GTG):   | 6.5ms                                                                          |
| Response Time (GTG w/OD):      | 6.551ms                                                                        |
| Response Time (Typical Tr+Tf): | 30ms                                                                           |
| Viewing Angles:                | 178° horizontal, 178° vertical, CR>5;<br>170° horizontal, 170° vertical, CR>10 |
| Backlight Life (Hours):        | 15000 Hrs (Min)                                                                |
| Curvature:                     | Flat                                                                           |
| Refresh Rate (Hz):             | 60                                                                             |
| Blue Light Filter:             | Yes                                                                            |
| Color Gamut:                   | NTSC: 45% size (Typ) sRGB: 64%<br>size (Typ)                                   |
| Pixel Size:                    | 0.179 mm (H) x 0.179 mm (V)                                                    |
| Surface Treatment:             | Anti-Glare, Hard Coating (3H)                                                  |

**COMPATIBILITY**

|                        |                                          |
|------------------------|------------------------------------------|
| PC Resolution (max):   | 1920x1080                                |
| Mac® Resolution (max): | 1920x1080                                |
| PC Operating System:   | Windows 10/11 certified; macOS<br>tested |
| Mac® Resolution (min): | 1920x1080                                |

**CONNECTOR**

|                                            |                                |
|--------------------------------------------|--------------------------------|
| USB 3.2 Type C DisplayPort Alt mode only : | 2 (60W power charger)          |
| 3.5mm Audio Out:                           | 1                              |
| Mini HDMI:                                 | 1                              |
| Power in:                                  | USB Type C (with video & data) |

**AUDIO**

|                    |             |
|--------------------|-------------|
| Internal Speakers: | 0.8Watts x2 |
|--------------------|-------------|

**POWER**

|                        |                        |
|------------------------|------------------------|
| Eco Mode (Conserve):   | 5.1W                   |
| Eco Mode (optimized):  | 6W                     |
| Consumption (typical): | 7W                     |
| Consumption (max):     | 7.3W                   |
| Voltage:               | AC 100-240V            |
| Stand-by:              | 0.5W                   |
| Power Supply:          | External Power Adaptor |

**CONTROLS**

|                    |                                                                                           |
|--------------------|-------------------------------------------------------------------------------------------|
| Physical Controls: | Up, Right, Down, Left, Power                                                              |
| On Screen Display: | Input Select, Audio Adjust, ViewMode,<br>Color Adjust, Manual Image Adjust,<br>Setup Menu |

**OPERATING CONDITIONS**

|                            |                             |
|----------------------------|-----------------------------|
| Temperature:               | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90%                  |

**INPUT SIGNAL**

|                       |            |
|-----------------------|------------|
| Frequency Horizontal: | 15 ~ 82KHz |
| Frequency Vertical:   | 50 ~ 75Hz  |

**VIDEO INPUT**

|               |                                                    |
|---------------|----------------------------------------------------|
| Digital Sync: | TMDS - mini HDMI (v1.4), Micro-<br>Packet - Type C |
|---------------|----------------------------------------------------|

**ERGONOMICS**

|                      |           |
|----------------------|-----------|
| Tilt (Forward/Back): | 20° / 60° |
|----------------------|-----------|

**WEIGHT (IMPERIAL)**

|                          |     |
|--------------------------|-----|
| Net (lbs):               | 1.8 |
| Net Without Stand (lbs): | 1.8 |
| Gross (lbs):             | 4.8 |

**WEIGHT (METRIC)**

|                         |      |
|-------------------------|------|
| Net (kg):               | 0.82 |
| Net Without Stand (kg): | 0.82 |
| Gross (kg):             | 2.2  |

**DIMENSIONS (IMPERIAL) (WXHXD)**

|                               |                   |
|-------------------------------|-------------------|
| Packaging (in.):              | 17.3 x 11.3 x 3.5 |
| Physical (in.):               | 14 x 8.8 x 0.6    |
| Physical Without Stand (in.): | 14 x 8.8 x 0.6    |

**DIMENSIONS (METRIC) (WXHXD)**

|                              |                |
|------------------------------|----------------|
| Packaging (mm):              | 440 x 288 x 89 |
| Physical (mm):               | 355 x 223 x 16 |
| Physical Without Stand (mm): | 355 x 223 x 16 |

**GENERAL**

|                   |                                                                                                                                                                                                                                          |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Regulations:      | cTUVus, FCC-B, ICES003, Energy<br>Star, EPEAT, CEC, NRCan, MX-CoC,<br>Mexico Energy, CE, CE EMC, CB,<br>RoHS, ErP, REACH, WEEE, EAC,<br>UkrSEPRO, UKCA, BSMI, RCM,<br>GEMS, VCCI, PSE, BIS                                               |
| PACKAGE CONTENTS: | VG1655 x1, mini HDMI to HDMI Cable<br>(v1.4; Male-Male) x1, USB Type-C<br>Cable (Male-Male) x1, USB Type-C to<br>Type-A 3.2 Gen1 Cable (Male-Male)<br>x1, AC/DC Adapter x1, Quick Start<br>Guide x1, Protect cover x1, Clean<br>cloth x1 |
| Recycle/Disposal: | Please dispose of in accordance with<br>local, state or federal laws.                                                                                                                                                                    |
| Warranty:         | *Warranty offered may differ from<br>market to market                                                                                                                                                                                    |
| Power Management: | Energy Star standards, EPEAT                                                                                                                                                                                                             |