
## Key **Features**

- SuperClear® IPS Technology
- Frameless Bezel and metallic triangle stand
- Full HD 1080p resolution
- 75Hz Refresh Rate with Adaptive Sync
- HDR10 Support



## Product **Description**

The ViewSonic VX3276-MHD-3 is the perfect blend of style and performance with features that include a sizeable 32" (31.5" viewable) Full HD display and minimalist design. With an ultra-slim profile, metallic silver triangle stand, and sleek edge-to-edge frameless bezel, the monitor has a premium feel that fits nicely both at home and in the office. VX3276-MHD-3 features 1080p resolution, IPS-type panel technology and support for industry standard HDR10. Combined with dual integrated speakers, this monitor produces astonishing visual and sound effects from multimedia contents.

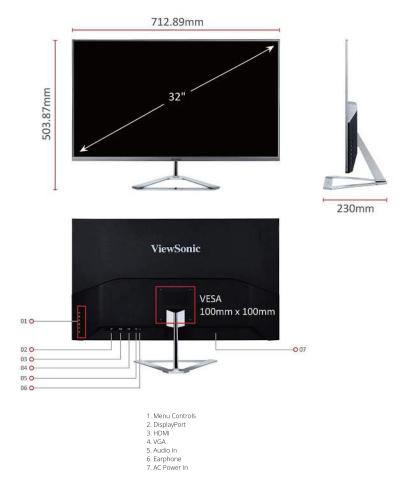

1 of 3 29-May-23, 03:46 PM

Visit Us www.viewsonic.com

2 of 3 29-May-23, 03:46 PM

DISPLAY

Display Size (in.): 32 31.5

Viewable Area (in.):

Panel Type: IPS Technology Resolution: 1920 x 1080 Resolution Type: FHD (Full HD) Static Contrast Ratio: 1,200:1 (typ)

Dynamic Contrast Ratio: 80M:1 Light Source: LED

Brightness: 250 cd/m² (typ)

Colors: 16.7M Color Space Support: 8 bit true Aspect Ratio: 16:9 Response Time (Typical GTG): 4ms

Viewing Angles: 178° horizontal, 178° vertical

Backlight Life (Hours): 30000 Hrs (Min)

Curvature Flat Refresh Rate (Hz): 75 Variable Refresh Rate Yes Technology Blue Light Filter: Yes Flicker-Free

NTSC: 72% size (Typ) sRGB: 104% size (Typ) Color Gamut: Pixel Size: 0.364 mm (H) x 0.364 mm (V)

Anti-Glare (Semi-Glossy), Hard Surface Treatment:

Coating (3H)

COMPATIBILITY

1920x1080 PC Resolution (max): Mac® Resolution (max): 1920x1080

Windows 7/8/8.1/10/11 certified; macOS tested PC Operating System:

1920x1080 Mac® Resolution (min):

CONNECTOR

VGA: 3.5mm Audio In: 3.5mm Audio Out: HDMI 1.4: DisplayPort:

Power in: 3-pin Socket (IEC C14 / CEE22)

26W

**AUDIO** 

2Watts x2 Internal Speakers:

**POWER** 

Eco Mode (Conserve): 31W Eco Mode (optimized): Consumption (typical): 36W Consumption (max): 40W Voltage: AC 100-240V

Stand-by: 0.5W

Power Supply: Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot:

**CONTROLS** 

Key 1 (game mode), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Physical Controls:

Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu On Screen Display:

OPERATING CONDITIONS

32°F to 104°F (0°C to 40°C) Temperature:

20% to 90% Humidity (non-condensing):

Copyright © ViewSonic Corporation 2000-2023. All rights reserved

**WALL MOUNT** 

VESA Compatible: 100 x 100 mm

INPUT SIGNAL

24 ~ 86KHz Frequency Horizontal: Frequency Vertical: 50 ~ 75Hz

VIDEO INPUT

TMDS - HDMI (v1.4), PCI-E -DisplayPort (v1.4) Digital Sync

13.7

Analog Sync: Separate - RGB Analog

**ERGONOMICS** 

Net (lbs):

Tilt (Forward/Back): -4° / 15°

WEIGHT (IMPERIAL)

Net Without Stand (lbs): 12.3 Gross (lbs): 18.1

WEIGHT (METRIC)

6.2 Net (kg): Net Without Stand (kg): 5.6 8 2 Gross (kg)

**DIMENSIONS (IMPERIAL) (WXHXD)** 

31.7 x 20 x 4.3 Packaging (in.): Physical (in.): 28.1 x 19.8 x 9.1 Physical Without Stand (in.): 28.1 x 16.4 x 1.5

**DIMENSIONS (METRIC) (WXHXD)** 

Packaging (mm): 806 x 509 x 109 Physical (mm): 713 x 504 x 230 Physical Without Stand (mm): 713 x 416 x 38

**GENERAL** 

CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UKrSEPRO, UKCA, BSMI, RCM, GEMS, KC, Regulations:

e-Standby, BIS

PACKAGE CONTENTS:

VX3276-MHD-3 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMl Cable (v1.4; Male-Male) x1, Quick Start Guide x1

Please dispose of in accordance with local, state or federal laws. Recycle/Disposal:

\*Warranty offered may differ from market to market Warranty: