



SPECIFICATIONS

Model Name	PRESTIGE X570 CREATION
CPU Support	Supports 2nd and 3rd Gen AMD Ryzen™ / Ryzen™ with Radeon™ Vega Graphics and 2nd Gen AMD Ryzen™ with Radeon™ Graphics Desktop Processors
CPU Socket	AM4
Chipset	AMD® X570 Chipset
Graphics	3 x PCI-E 4.0 x16 slots
Interface	Support 2-way SLI / 3-way CrossFire™
Memory Support	4 DIMMs, Dual Channel DDR4
Expansion Slots	4 x PCI-E 2.0 x1 slots
Storage	6 x SATA 6Gb/s ports 2 x Lightning M.2 Gen4 slots
USB Ports	3 x USB 3.2 (Gen2) + 14 x USB 3.2 (Gen1) + 6 x USB 2.0
LAN	Aquantia AQC107 (10GbE) + Intel® I211AT Gigabit LAN
Wireless / BT	Intel® Wi-Fi 6 AX200
Audio	8-Channel (7.1) HD Audio with Audio Boost 4

FEATURES



Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.



WiFi 6

The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



Frozr Heatsink Design

Designed with the patented fan and double ball bearings to provide best performance for enthusiast gamers and prosumers.



Extended Heat-Pipe Design

Enlarge the surface of heat dissipation, connecting from MOS heatsink to chipset heatsink.



Creator Center

An optimized software with various system modes and resources for a wide range of scenarios and needs.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



Lightning Gen4 Solution


The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



10G Super LAN

Next level network speed, secure networking with fastest data throughput to improve efficiency.

CONNECTIONS

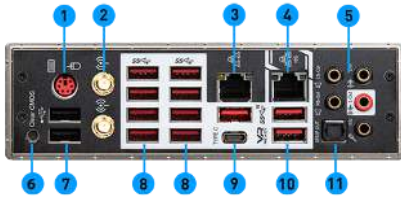

- 1. PS/2 Combo Port
- 2. Intel Wi-Fi 6
- 3. LAN Port
- 4. 10G LAN Port
- 5. HD Audio Connectors
- 6. Clear CMOS Button
- 7. USB 2.0 Ports
- 8. USB 3.2 Gen1 Ports
- 9. USB 3.2 Gen2 Type-A+C
- 10. USB 3.2 Gen1 Type-A
- 11. Optical S/PDIF OUT